
## E179T








Working Height\*: 17,1 m
Max. Outreach\*: 12,1 m
Basket Capacity: 200/80 kg
Turret Rotation: 450°
Basket Rotation: 70° + 70°
GVW min.\*: 3,5 to

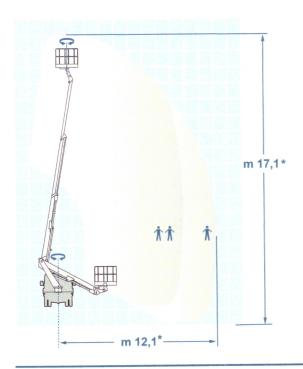



























## Standard features include

- Fully proportional hydraulic controls with multifunction joysticks
- Simultaneous and independent movements
- Internal hoses
- Easy access to the basket
- Tubular steel or fibreglass basket
- Automatic basket levelling
- Hydraulic basket rotation
- Control panels protected against accidental collision
- Telescopic cylinder mounted below the booms
- Cleaning brushes on all telescopic boom sections
- Turret rotation on self braking slewing system
- Colour scheme white RAL 9010 for the aerial platform, black RAL 9011 for the cylinders
- Rectangular boom
- Antislip aluminium decking
- Vehicle engine start / stop from the basket


Wide series of vehicle fittings and accessories available. For detailed information contact sales office.


## Safet

- Outrigger / Boom interlocks
- Emergency stop at the basket and the ground control points
- Failsafe lock valves to all hydraulic cylinders
- Spirit level indicator
- Emergency controls located on the base
- Control lights in the cab indicating outriggers grounded and in stowed position
- Manual emergency pump
- Conformity declaration (CE)


## Extra accessories

- Electric emergency pump
- Hour meter connected to the power take-off of the vehicle
- 230/110V wiring to the basket
- Mains powered electric motor for engine-off use (switched from the ground)
- Rotating beacon
- Safety harness and lanyard
- Spotlight in the basket
- Special painting
- N. 4 wooden outrigger pads
- Tool box under the decking
- Walk-In fibreglass basket
- Cab protection
- Deck enclosures





m 17.1\*



F148T

E179T

F200T

MODEL	Working Height (m)*	Max. Outreach (m)*	Basket Capaciy (kg)	Turret Rotation (°)	Basket Rotation (°)	GVW min. (to)*
E148T	13,7	8,4	200	450	70 + 70	3,5
E179T	17,1	12,1	200/80	450	70 + 70	3,5
E200T	20,2	13,0	200/80	450	70 + 70	3,5

<sup>\*</sup> Depending on vehicle



GSR SpA Via Lea Giaccaglia, 5 - 47924 Rimini (RN) - Italia Tel. + 39 0541 397811 - Fax + 39 0541 384491 www.gsrspa.it e-mail: sales@gsrspa.it

Company with Quality Management System certified by DNV - ISO 9001:2008

Dealer